




IMPORTANT NOTE:

- This Outdoor Unit (CAY) is configured to match with Standard Profile (EVY) indoor unit.
- Re-configuration is required, to match this unit with Low Profile (ELY) Indoor Unit, as follows:




INDOOR UNIT (Standard Profile)



INDOOR UNIT (Low Profile)


Configuration Procedure:

1. After powering-up the Control Interface, the main screen will be displayed.

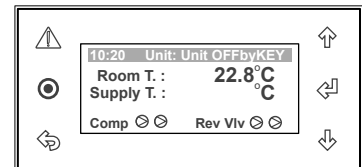


2. Follow the configuration below.


Main Menu → A. On/Off Unit → G. Service → Ga. Change Language → Gf. Service settings

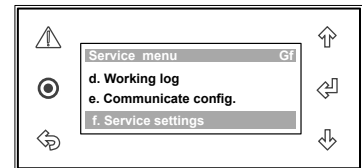


3. Press the “↵” Button and enter the Service Password (7378) in order to access service settings.

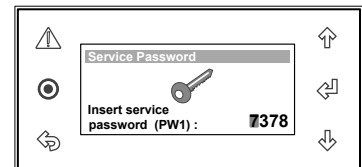

4. Press the “↵” Button, the screen “Thermoregulation Gfc1” will be displayed.

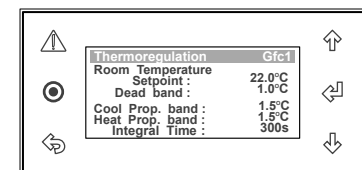


5. Press the “↓” Button to scroll down to “S. Configuration Gfc12” and press the “↵” Button.

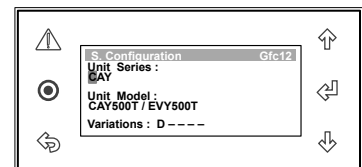


Notes:


- The cursor “■” will appear next to “CAY”.
- All user settings will be LOST if the Unit Series / Unit Model is changed.
- Ensure that settings are noted down for re-configuration.

6. Press the “” Button twice to access “Unit Model” selections.

EXAMPLE:


Unit Model combination with Standard Profile Indoor Unit: “CAY500T/ EVY500T”

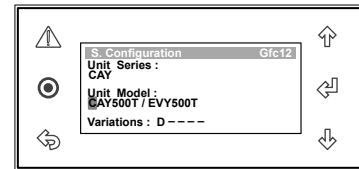


7. Keep pressing the “” Button until you get into the model of your Low Profile Indoor Unit.


EXAMPLE:


Unit Model combination with Low Profile Indoor Unit : “CAY500T/ ELY500T”

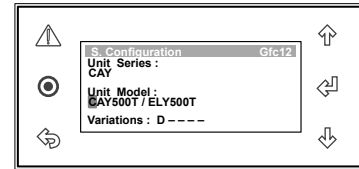

8. Press the “” Button to lock-in the “Unit Model”.

NOTES:


- The cursor “” will appear and blink on the second Variation code.
- “D” is the default setting and cannot be changed.

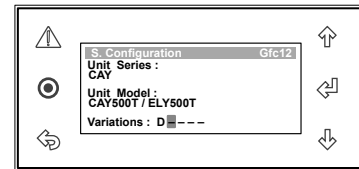


9. Check the rating label to confirm if the system has variation code. Ensure this variation code is also configured in the control interface.

EXAMPLE:

50kW OD Unit with 3Ph Sequence Relay (Variation W) **CAY500T-TA-KW**

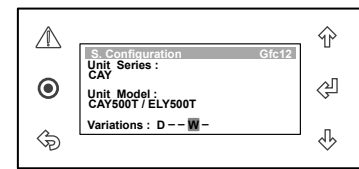

10. Press the “” Button to complete the unit configuration.

